


## Features:

- **Go Green** All the veneers in *RevolutionPly*® plywood come from plantation and sustainable wood sources. *RevolutionPly*® plywood contains no tropical species.
- NGBS Green Certified RevolutionPly® plywood is certified for points toward ICC-700 National Green Building Standard<sup>™</sup> (NGBS).
- Flooring Industry Approved RevolutionPly® plywood has been tested and approved by major flooring manufacturers. RevolutionPly® plywood is the only Lauan plywood substitute that has been approved by flooring manufacturers for use as underlayment.
- Approved For Use Under These Flooring Products Sheet vinyl, vinyl composite tile (VCT), luxury vinyl tile (LVT), ceramic tile, carpet, engineered flooring, and wood floors.
- Third Party Certified RevolutionPly® plywood has been given a low risk assessment for legal and environmental issues related to its wood sourcing.
- Awarded Utility US Patent in April 2013 - U.S. Patent No. 8,414,996
- Awarded Method US Patent in January 2016 - U.S. Patent No. 9,242,391
- **Premium Grade and Appearance** 100% uniform light color from sheet to sheet. Every panel has an A grade face veneer.
- Strength & Stability 5-ply construction with machine-dried cores.
- Multi-purpose Panel RevolutionPly® plywood is ideal for a variety of applications, including flooring underlayment, paneling, millwork and woodworking projects\*.
- **Easy to Use** Straight uniform grain for ease of cutting, scoring, finishing, and applying adhesives.
- Best Packaging in the Industry All crates of *RevolutionPly*® Plywood include two layers of packaging for complete product protection and damage-free arrival.
- Online Support The RevolutionPly® plywood Warranties, Installation Guide, and Video are all available at www.RevolutionPly.com.
- EPA TSCA Title VI

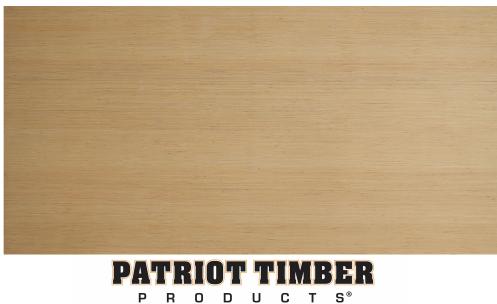

Post Office Box 19065 • Greensboro, North Carolina 27419 Telephone 336.299.7755 • Facsimile 336.299.4050

the revolutionary source®

www.PatriotTimber.com

www.RevolutionPly.com

## Specifications:

- Thicknesses from 2.7 mm up to 18 mm
- Sizes 4' x 8', 3' x 7' and other widely used plywood sizes
- 5.2 mm (nominal) x 4' x 8' 100 pieces per crate 26 crates per truckload
- EPA TSCA Title VI

\*Panels are designed for interior applications only (not for direct exterior exposure).



**Protective Packaging**